


MicroSol[®] 585XT

**Extended-life, Nonchlorinated
Semisynthetic**

TRIM[®] MicroSol[®] 585XT is a high-lubricity, semisynthetic, microemulsion coolant. The formula delivers extended sump life and better foam control versus previous generation semisynthetics. It provides excellent cooling and mechanical lubricity, along with the machine-friendly characteristics you expect from a premium TRIM[®] coolant. While it is particularly well suited for machining and grinding gray iron, it does very well in mixed metal situations. MicroSol 585XT has proven to be an exceptional machining fluid for titanium alloys.

MicroSol

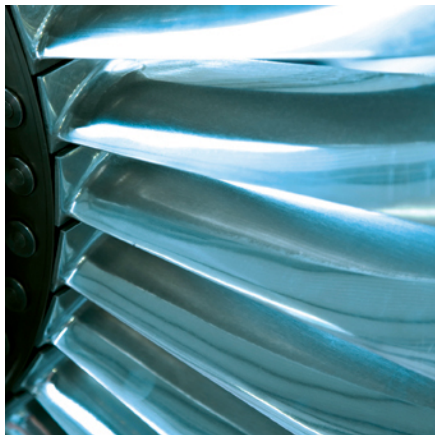

A major US manufacturer of aerospace turbine blades significantly increased profitability with MicroSol 585XT.

A case for MicroSol 585XT:

A major US manufacturer of aerospace turbine blades mills and turns aluminum and titanium alloys. They had used other coolants and had seen problems with foul smell, high carryoff, damaged seals, residue, smoking and excess makeup. Then they changed to MicroSol 585XT!

Now they experience very long sump life, no problems with odour, residue, seal damage, smoke, or excessive carryoff, and they have a cleaner, better work environment. And they have seen significantly increased profitability with MicroSol 585XT!



Choose MicroSol 585XT:

- Dramatically extends useful life without the need for tank side biocides or fungicides
- Formaldehyde free
- Low foaming for demanding high-pressure, high-volume applications
- Compatible with a very wide range of material including steels, copper, and aluminium alloys, and many plastics and composites
- Optimised combination of cooling and lubricity for titanium machining applications
- Excellent alternative to high mineral oil soluble oils on high-silica aluminium alloys
- Contains no nitrites, phenols and chlorinated or sulfurised EP additives
- Provides superior corrosion inhibition on all ferrous and nonferrous metals
- Keeps machines very clean while leaving a soft fluid film for ease of cleaning and reduced maintenance
- Uses standard metalworking recycling and disposal techniques

MicroSol 585XT especially for:

Applications — band sawing, belt grinding, Blanchard grinding, corrosion inhibition, cylindrical form grinding, double disc grinding, drilling, high-pressure, high-volume, in-feed centerless grinding, internal grinding, plain grinding, reaming, roll threading, surface grinding, surface milling, tapping, thread forming, through-feed centerless grinding and turning

Metals — 6000 series aluminium, aerospace aluminium alloys, aluminium alloys, brass, bronze, cast aluminium, cast iron, composites, copper, exotic alloys, ferrous metals, glass, gray cast iron, heat-treated steel, high-carbon steel, high-nickel alloys, nonferrous metals, plastics, stainless steels, steels, titanium, titanium alloys, tool steels, wrought aluminium and yellow metals

Industries — aerospace, compressor, energy, firearms & ammunitions, machine tool manufacturers and medical

MicroSol 585XT is free of — chlorinated EP additives, formaldehyde releasers, nitrites, phenols and sulphurised EP additives

LIONOIL

ANTWERP LION OIL WORKS N.V.

Vlaamsekaai 2-5 B-2000 Antwerpen
T.: +32 (0)3 237 00 45 F.: +32 (0)3 216 21 92
info@lionoil.be www.lionoil.be



Master Fluid
SOLUTIONS™

MicroSol[®] 585XT

**Extended-life, Nonchlorinated
Semisynthetic**

Application Guidelines

- MicroSol 585XT performs well where traditional soluble oils may not cool sufficiently.
- In mixed-metal situations, concentration control is critical to fight galvanic corrosion (7.5% plus).
- Running at or above 7.5% offers the best sump life and corrosion inhibition on cast iron chips.
- MicroSol 585XT is not recommended for use on very reactive metals such as magnesium.
- For additional product application information, including performance optimisation, please contact your Master Fluid Solutions Authorised Distributor at <https://www.2trim.us/distributors.php>, your District Sales Manager, or call our Tech Line at +44 (0)1449 726808.

Physical Properties Typical Data


Colour (Concentrate)	Straw
Odour (Concentrate)	Mild amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D93-08)	> 160°C
pH (Concentrate as Range)	9.2 - 10.2
pH (Typical Operating as Range)	8.8 - 9.8
Coolant Refractometer Factor	1.2

Recommended Metalworking Concentrations

Light duty	4.0% - 6.5%
Moderate duty	6.5% - 8.5%
Heavy duty	8.5% - 10.0%
Design Concentration Range	4.0% - 10.0%



Concentration by % Brix

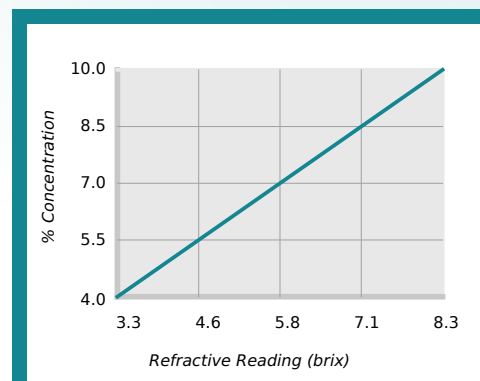

% Concentration = Refractive Reading x Refractive Factor
Coolant Refractometer Factor % Brix = 1.2

Health and Safety

For further information, see the most recent SDS which is available directly from Master Fluid Solutions or from your Master Fluid Solutions Authorised Distributor.

LIONOIL

ANTWERP LION OIL WORKS N.V.

Vlaamsekaai 2-5 B-2000 Antwerpen
T.: +32 (0)3 237 00 45 F.: +32 (0)3 216 21 92
info@lionoil.be www.lionoil.be



Master Fluid
SOLUTIONS™

MicroSol[®] 585XT

**Extended-life, Nonchlorinated
Semisynthetic**



Mixing Instructions

- Recommended usage concentration in water: 4.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: apps.masterfluidsolutions.com/makeup/.
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.

Ordering Information

20-litre pail

204-litre drum

1000-litre IBC

TRIM[®] MicroSol[®] 585XT | ©2009-2019 Master Fluid Solutions™ | 2019-12-16

Additional Information

- Use Master STAGES™ Whamex™ for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM[®] and MicroSol[®] are registered trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES™ and Whamex™ are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

https://2trim.us/di/?plr=MS585XT*en*eu



LIONOIL

ANTWERP LION OIL WORKS N.V.

Vlaamsekaai 2-5 B-2000 Antwerpen
T.: +32 (0)3 237 00 45 F.: +32 (0)3 216 21 92
info@lionoil.be www.lionoil.be



Master Fluid
SOLUTIONS™